



archlit reserves the right to make changes without prior notice. (08.03.2021)

LeeSti Tomas is a pendant fixture that adds acoustical treatment due to the felt component. Direct and indirect lighting options. Diminutive 1" x 1" extruded aluminum profile. Lighting modules include diffusing film for visual protection and to eliminate diode imaging on the lens while minimizing optical glare. Indirect version with no diffusing film to enhance output. Drivers are remote max of 100'. Emergency package that can be located at the same distance (emergency package to 4 boards max). Optional more than 1 Emergency package per fixture.

LTom

LeeSti Tomas Pendant

Lumen Output

3017 - 3000 K 1200 lumens / ft 12 w /ft

3014 - 3000 K 1000 lumens / ft 10 w /ft

3011 - 3000 K 780 lumens / ft 7.5 w /ft

3508 - 3500 K 560 lumens / ft 5.5w /ft

3505 - 3500 K 350 lumens / ft 3.1 w /ft

3517 - 3500 K 1200 lumens / ft 12 w /ft

3514 - 3500 K 1000 lumens / ft 10 w /ft

3511 - 3500 K 780 lumens / ft 7.5 w /ft

3008 - 3000 K 560 lumens / ft 5.5w /ft

3005 - 3000 K 350 lumens / ft 3.1 w /ft

WhTu - White tuning 2700K @ 1050 lumens/foot

and 6500k @1200 lumens/foot 12.5 watt/foot

All Uplight versions with light will have a transparent diffuser

Use of programmable drivers allow different outputs (lumen output and load) to fix color temperature versions

Down Lighting Components

DN - Down No Light

DTF - Down towards felt

DLD - Down Light Direct

Up Lighting Components

UN - Up No Light

UTF - Up Light Towards Felt

UPI - Up Light Indirect

Light indirect towards Ceiling

Finish

WH - White

BK - Black

Cu - Custom Color

Specify RAL color

Lighting fixtures color

Felt Color

Fst - Gray Felt

Fop - Other Felt Options

Consult Factory for other possible colors

Standard color is gray

Dimming

O - Non Dimmable 120v

1 - Non Dimmable 277v

4 - Dimmable 0-10v (4wires, 120 or 277 v)

Dimmable TRIAC (2 wires, max 25w, 120v) requires more drivers if run is bigger than 2'

Canopy

RD - Round 4" x 4" JBox

SQ - Square Plate 4"x 4"

Suspension Aircraft Cable

36 - 36" max

100 - 100" max

Scu - Suspension Custom Length

Specify requested max length in inches

Emergency

00 - No Emergency

EM - Emergency

Max distance to remote emergency packs 50' We recommend to have emergency packs and drivers in a cluster


Specify how many packs per fixture (each pack for 4 feet of light)

Emergency Output is 75% of lighting when connected to line output

Notes:


Drivers are remote

Max distance to drivers 100'

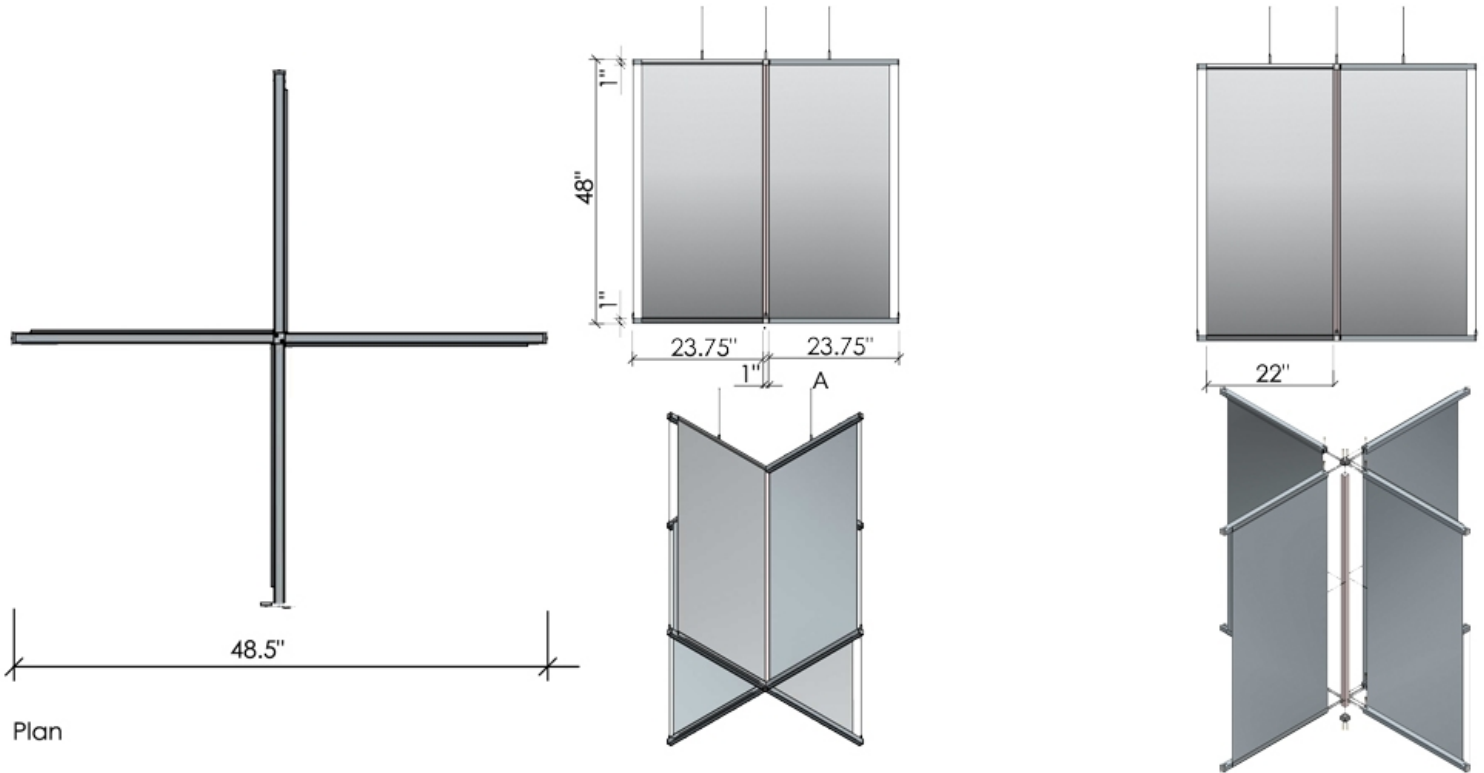




Remote Drivers

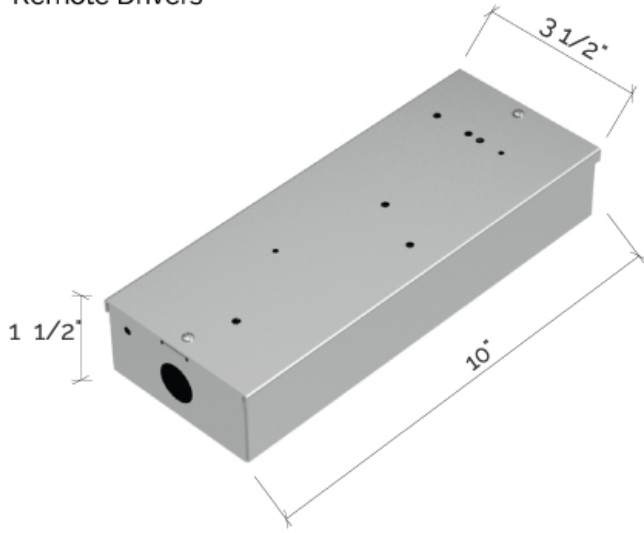

Driver Box for Dimm 0-10v
NTS

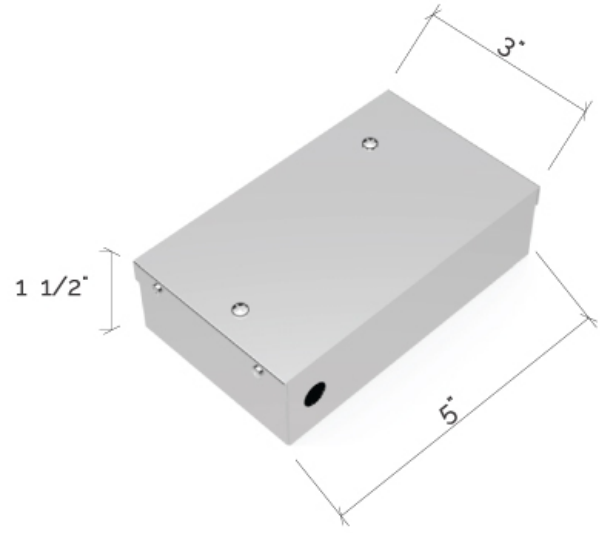

Driver Box Non Dimm and TRIAC drivers
NTS

