





- 1. Disconnect electrical power from lighting circuit before installation.
- 2. CAUTION-RISK OF FIRE. This product must be installed in accordance with the applicable NEC/local installation code by a person familiar with the construction and operation of the product and the hazards involved.
- 3. Make sure LED drivers, Linear LED Modules and all other fixture components are present.
- 4. This installation assumes Class 2 two conductor wires have been run from fixture mount location to LED driver enclosure location.
- 5. LED driver enclosure must be installed in an accessible. dry and well ventilated location. using the screw holes provided in enclosure.
- 6. Make wire connection from LED driver to two conductor Class 2 wire, running in ceiling with wire nuts (not included). Then make wire connection from LED module canopy to exposed Class 2 wire with wire nuts at j-Box.




eeSti Pendant

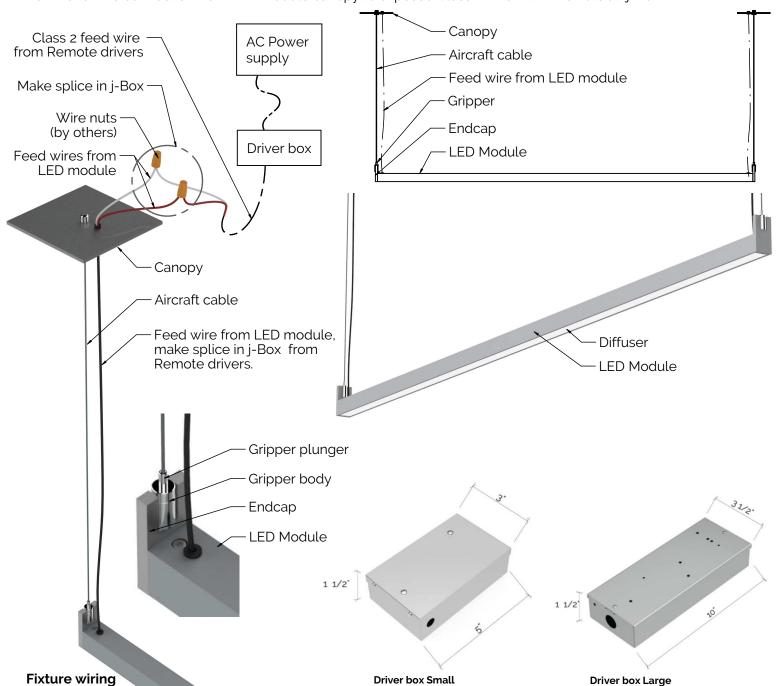

- 7. If more than one fixture is to be connected in a continuous line, then make the joint between two LED modules using Mid-support endcap and follow step 6 for each module.
- 8. After j-Box wiring is complete, install j-Box Strap to j-Box. Secure LED pendant and Canopy to j-Box by hand tightening Suspension Cable Knob into j-Box Strap or directly to ceiling using C-slot gripper for non powered end, whichever is applicable. Adjust fixture height and cable length by pushing gripper plunger down to release cable.
- 9. Make sure fixture is well secured to ceiling and there are no pinched or exposed wires.
- 10. Make Mains power connection to LED driver using provided connector inside driver enclosure. Make sure Mains power Ground wire is secured to green ground
- wire inside driver enclosure. 11. Restore Mains power.

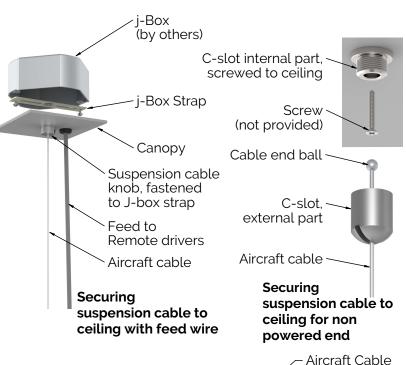

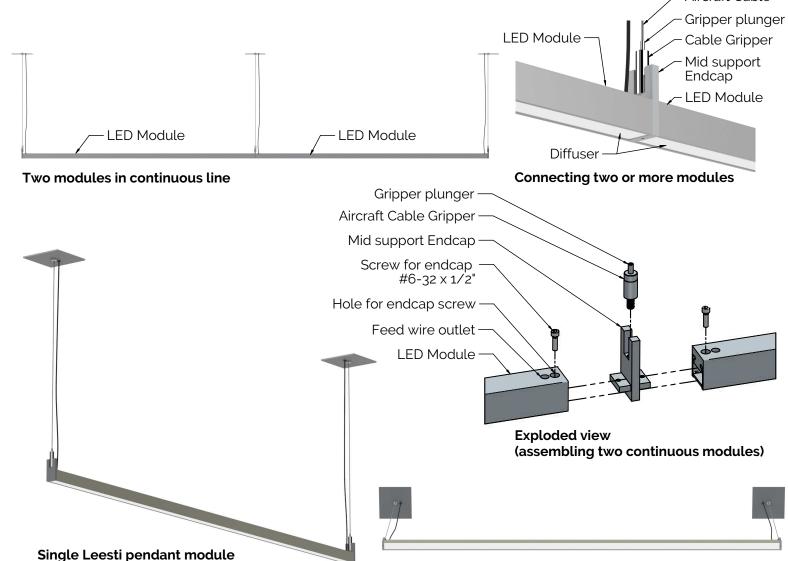

Perspective View from below

(Power feed at both ends)